

ITEM	DESCRIPTION	PACK
------	-------------	------

HILLYARD FIRST IN GYM FINISHES®

Since the 1920's, the Hillyard name has become synonymous with beautiful wood sports floors. When the company's founder, Newton S. Hillyard, first developed a finish to take the place of early oil dressings, the whole complexion of indoor sports changed for the better. Since that day, Hillyard has expanded its extensive research and development capabilities to maintain its leadership in wood gym floor care.

WATER-BASED FINISH SYSTEMS

A. CONTENDER® FINISH & GYM LINE MARKING PAINTS * 

The unique, epoxy-based formula offers significant advantages over the conventional water-based urethane finishes, including ease-of-application, higher gloss, and unsurpassed durability. Delivers performance equal to the best solvent-based coating found on the market. Provides the toughness, abrasion resistance, and durability necessary to stand up to the heaviest of traffic and tournament play. Compatible over a wide variety of conventional solvent-based epoxies and oil-modified urethanes, provided these coatings are cured and bonded and the floor is properly prepared. Water-based Contender® paints are formulated in brilliant colors that brush on easily and level out smoothly.

HIL0027906	1 gal.	1
HIL0027907	5 gal.	1
HIL0068004	1 qt. Red Contender® Paint	1
HIL0068104	1 qt. Blue Contender® Paint	1
HIL0068204	1 qt. Black Contender® Paint	1
HIL0068304	1 qt. White Contender® Paint	1
HIL0068404	1 qt. Yellow Contender® Paint	1

B. TIP-OFF® * 

No mixing, no stirring, or complicated application. Provides a quick, beautiful, water-based solution for wood gym floors. VOC value of less than 250 grams per liter. Dries faster than conventional solvent-based systems. Recoat after just four hours. Compatible over a wide variety of conventional solvent-based and water-based coatings. One gallon covers approximately 500-700 square feet, depending on floor conditions.

HIL0028206	1 gal.	4
HIL0028207	5 gal.	1

* Classified by Underwriters Labs, Inc.® as to slip resistance (186S).



Hillyard's Green Select products are formulated to minimize the impact on the environment, reduce the risk to human health and at the same time improve worker safety.

A Note About Treating Dust Mops

Super Hil-Tone® and Hil-Mist® are easy to apply ... just remember to always treat your dust mops the night before they're to be used. For new or freshly laundered mops, determine the length of the dust mop (in feet), and apply two ounces of Super Hil-Tone® or Hil-Mist® per foot for the initial treatment. For example, a three-foot dust mop would require six ounces for the first treatment. For retreating, apply one ounce of Super Hil-Tone® or Hil-Mist® per foot. In other words, for retreating a three-foot dust mop, it would only take three ounces of Super Hil-Tone® or Hil-Mist®.



ITEM DESCRIPTION PACK

A. PRE-GAME™

Water-based wood floor preparation and tacking concentrate. Designed for scrubbing wood floors in preparation for coating and tacking between coats of water-based or solvent based wood seals and finishes. Pre-Game helps to remove dust, dirt and other contaminants and helps to ensure a clean surface for coatings to bond. Not for use to tack raw wood or membrane curing compounds or for cleaning equipment.

HIL0045606 1 gal. 4



B. 1907™ GYM FINISH * †



An oil-modified urethane in a waterborne formulation that provides the durability and depth of gloss of a traditional oil-based finish with the clarity of a water-based finish. 1907 Gym Finish has a very low VOC level (under 190 grams per liter) and very low odor, both making it easy to apply with minimal impact on workers and building occupants. Can be recoated in 2 to 4 hours without abrasion between coats, allowing for multiple coats in a single day. Once the final coat is applied, the floor can be opened to foot traffic in 24 hours and put back in full use in 72 hours under normal conditions. 1907 Gym Finish may also be used as a seal on new or freshly sanded floors. Average coverage rate of 500-550 square feet per gallon.

HIL0028033 2.5 gal.



C. TACK-IT®

Special water-based formulation for tacking between coats of wood seals and finishes. Removes dust and dirt that may have settled on the floor. Leaves no greasy or oily residue. It can be used successfully with both solvent- and water-based seals and finishes. Dries in only 30 minutes under normal conditions so you can begin applying seals or finishes almost immediately. It is the perfect tacking formula for areas with stringent VOC standards. Unlike many solvent-based products, it emits no harsh, irritating fumes that can make finishing a wood floor difficult and unpleasant. Comes ready-to-use. Low odor formulation. Not for use on raw wood.

HIL0045806 1 gal. 6



HIL0045807 5 gal. 1



Hillyard's Green Select products are formulated to minimize the impact on the environment, reduce the risk to human health and at the same time improve worker safety.



**HILLYARD - The Official
Cleaning and Maintenance
Products Company of the
Basketball Hall of Fame,
Springfield, Massachusetts.**

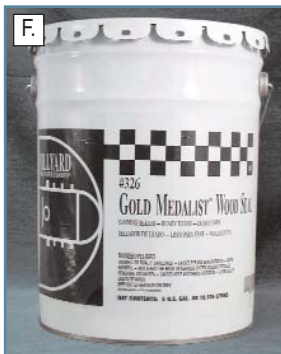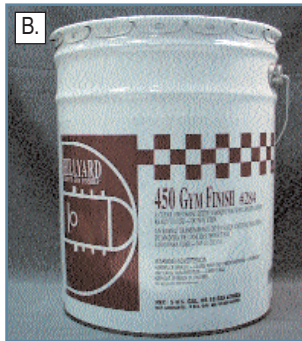

ITEM	DESCRIPTION	PACK
SOLVENT-BASED FINISH SYSTEMS		
A. 350 GYM FINISH® *		
High-quality, solvent-based, urethane finish meets strict VOC requirements. Dries to a smooth, durable finish that resists rubber burns and heel marks. When maintained regularly with a Super Hil-Tone® treated dust mop, the surface will remain bright, protected and free of grit. Its ideal frictional resistance provides excellent footing for fast action activities or sporting events. Average coverage of 500-600 square feet per gallon.		
HIL0026006	1 gal.	6
HIL0026007	5 gal.	1
B. 450 GYM FINISH® * †		
Durable, high-solids, urethane wood gym finish meets strict VOC requirements. The VOC value for 450 Gym Finish® is less than 450 grams per liter. Compatible over a wide variety of conventional solvent-based and water-based coatings, provided these coatings are cured, bonded, and the floor is properly prepared. No mixing necessary. Ideal for single coat applications. Each gallon covers an average of 500-600 square feet per gallon.		
HIL0028406	1 gal.	6
HIL0028407	5 gal.	1
C. & D. TROPHY® GYM FINISH® * † & TROPHY® WOOD SEAL® *		
A durable epoxy base gym finish that requires minimal daily care and provides long-lasting protection without the need for excessive recoating. Very resistant to spills and stains. Brings out the beautiful grain of the wood and greatly enhances the floor's natural beauty and will not darken or yellow with age and covers an average 500-60 sq. ft. per gal. <i>Epoxy based Trophy Wood Seal is the perfect foundation for Trophy Gym Finish with an average coverage rate of 350-500 sq. ft. per gal.</i>		
HIL0027806	Finish 1 gal. (covers 500-600 sq. ft. per gal.)	6
HIL0027807	Finish 5 gal. (covers 500-600 sq. ft. per gal.)	1
HIL0034807	Seal 5 gal. (covers 350-500 sq. ft. per gal.)	1
E. & F. GOLD MEDALIST® WOOD GYM FINISH® * & GOLD MEDALIST® WOOD SEAL® * †		
High quality, urethane wood gym finish that dries to a smooth, durable surface. Resists rubber burns and heel marks and repels abrasive dust and dirt. Perfect choice for multi-purpose wood gym floors and stages. Ideal for friction resistance to provide excellent footing for fast action activities or sports events. Covers an average 500-600 sq. ft. per gal. <i>Gold Medalist Wood Seal is a solvent-based urethane sanding seal that is the perfect foundation for Gold Medalist Wood Gym Finish and covers an average 350-500 sq. ft. per gal.</i>		
HIL0028506	Finish 1 gal.	6
HIL0028507	Finish 5 gal.	1
HIL0032607	Seal 5 gal.	1

A. 350 GYM FINISH® *

High-quality, solvent-based, urethane finish meets strict VOC requirements. Dries to a smooth, durable finish that resists rubber burns and heel marks. When maintained regularly with a Super Hil-Tone® treated dust mop, the surface will remain bright, protected and free of grit. Its ideal frictional resistance provides excellent footing for fast action activities or sporting events. Average coverage of 500-600 square feet per gallon.

HIL0026006	1 gal.	6
HIL0026007	5 gal.	1

B. 450 GYM FINISH® * †

Durable, high-solids, urethane wood gym finish meets strict VOC requirements. The VOC value for 450 Gym Finish® is less than 450 grams per liter. Compatible over a wide variety of conventional solvent-based and water-based coatings, provided these coatings are cured, bonded, and the floor is properly prepared. No mixing necessary. Ideal for single coat applications. Each gallon covers an average of 500-600 square feet per gallon.

HIL0028406	1 gal.	6
HIL0028407	5 gal.	1

C. & D. TROPHY® GYM FINISH® * † & TROPHY® WOOD SEAL® *

A durable epoxy base gym finish that requires minimal daily care and provides long-lasting protection without the need for excessive recoating. Very resistant to spills and stains. Brings out the beautiful grain of the wood and greatly enhances the floor's natural beauty and will not darken or yellow with age and covers an average 500-60 sq. ft. per gal. *Epoxy based Trophy Wood Seal is the perfect foundation for Trophy Gym Finish with an average coverage rate of 350-500 sq. ft. per gal.*

HIL0027806	Finish 1 gal. (covers 500-600 sq. ft. per gal.)	6
HIL0027807	Finish 5 gal. (covers 500-600 sq. ft. per gal.)	1
HIL0034807	Seal 5 gal. (covers 350-500 sq. ft. per gal.)	1

E. & F. GOLD MEDALIST® WOOD GYM FINISH® * & GOLD MEDALIST® WOOD SEAL® * †

High quality, urethane wood gym finish that dries to a smooth, durable surface. Resists rubber burns and heel marks and repels abrasive dust and dirt. Perfect choice for multi-purpose wood gym floors and stages. Ideal for friction resistance to provide excellent footing for fast action activities or sports events. Covers an average 500-600 sq. ft. per gal. *Gold Medalist Wood Seal is a solvent-based urethane sanding seal that is the perfect foundation for Gold Medalist Wood Gym Finish and covers an average 350-500 sq. ft. per gal.*

HIL0028506	Finish 1 gal.	6
HIL0028507	Finish 5 gal.	1
HIL0032607	Seal 5 gal.	1

* Classified by Underwriters Laboratories, Inc.® as to slip resistance (186S).

† Approved by the Maple Flooring Manufacturers Association (MFMA).

ITEM DESCRIPTION PACK

A. TROPHY® PLUS GYM FINISH * †

Delivers the same durability and protection as original Trophy® Finish, but now it's easier to apply with less lathering or foaming than conventional solvent-based products. Less solvent odor than other solvent-based coatings. Covers an average 500-600 square feet per gallon.

HIL0027706	1 gal.	6
HIL0027707	5 gal.	1



B. FAST DRY 450 GYM FINISH II * †

Durable, high solids, urethane wood gym finish meets the new, strict national VOC requirements. The VOC value is less than 450 grams per liter. Under normal drying conditions, Fast Dry 450 Gym Finish dries within 12 hours allowing additional coats to be applied. Each gallon covers an average 500-600 square feet per gallon.

HIL0027106	1 gal.	6
HIL0027107	5 gal.	1



C. 550 SEAL II *

This 37% solids, fast-drying urethane seal is formulated to meet the new, strict national VOC requirements. The VOC value of 550 Seal is less than 550 grams per liter. Using 550 Seal in conjunction with 450 Gym Finish delivers the state-of-the-art solvent-based system. Under normal drying conditions, it dries within 12 hours allowing additional coats to be applied. Covers an average 350-500 square feet per gallon. Classified by Underwriters Laboratories, Inc.® as to slip resistance (186S).

HIL0032207	5 gal.	1
-------------------	--------	---



D. KLEEN-UP SOLVENT®

Special blend of highly refined solvents designed for tack ragging raw wood or between coats of seal and finish. Removes dust and dirt which may have settled on the surface and helps ensure good adhesion between coats. Perfect for cleaning tools and equipment used to apply solvent-based seals and finishes. Evaporates quickly and leaves no greasy or oily residue.

HIL0043706	1 gal.	6
HIL0043707	5 gal.	1



E. 1 SHOT LETTERING ENAMELS



Superior, oil based, high gloss gym floor lining and graphics paints that have been the benchmark in lettering enamels for over 50 years. Excellent flow characteristics, single stroke coverage and vibrant durability are a few of the reasons Hillyard recommends 1 Shot Lettering Enamels. In stock colors are listed below and many other standard colors are available by special order from Hillyard.

SPY103L	Polar White, 1 qt.	6
SPY199L	Lettering Black, 1 qt.	6
SPY134L	Chrome Yellow, 1 qt.	6
SPY124L	Orange, 1 qt.	6
SPY104L	Bright Red, 1 qt.	6
SPY114L	Medium Brown, 1 qt.	6
SPY161L	Proper Purple, 1 qt.	6
SPY158L	Dark Blue, 1 qt.	6
SPY148L	Dark Green, 1 qt.	6
SPY142L	Emerald Green, 1 qt.	6
SPY152L	Light Blue, 1 qt.	6



* Classified by Underwriters Laboratories, Inc.® as to slip resistance (186S).

† Approved by the Maple Flooring Manufacturers Association (MFMA).